



PURE LIVING COMFORT

With an 82 mm construction depth, Schüco Living 82 meets the highest standards of comfort, energy efficiency, and design – ideal for new buildings.



TOP INSULATION VALUES

With a U_w value from 0.76 $W/(m^2K)$, Living 82 sets new standards – for energy-efficient construction and low heating costs.



NOTICEABLE QUIETNESS

The profile system achieves, with appropriate soundproof glazing, a sound insulation of up to 47 dB – for noticeably better living quality.



SEALED IN TWO WAYS

Two sealing systems to choose from: With either a rebate or central seal, Living 82 adapts to every requirement – both technically and aesthetically.



SUSTAINABLY DESIGNED

Schüco Living 82 is supplied with a recycled core as standard – for long lasting quality and responsible, resource-saving construction.

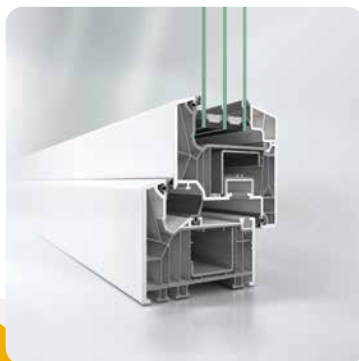


DESIGN FLEXIBILITY

Individual color options, modern sash geometries, and large glass surfaces – Living makes design wishes come true.

SCHÜCO

PREMIUM PARTNER

PROFILE SYSTEM
LIVING 82**Suitable for:****BREEAM®****TECHNICAL DATA**

Basic depth outer frame	82 mm
Basic depth vent	82 mm
Uw value	0,76 W/(m²K)*
Glass thickness outer frame	16-52 mm
Glass thickness vent	16-52 mm
Max. vent width**	1500 mm
Max. vent height**	2600 mm
Max. sound reduction index Rwp	47 dB(A)
Air permeability	Class 4
Watertightness	Class 9A
Burglar resistance	up to RC 2
Wind load resistance	Class B5
Max. vent weight	120 kg

Operating forces Class 1**Mechanical strength** Class 4, DIN EN 13115**Proof of durability** DIN EN 12400, Class 2**Drainage levels**
2 for rebate seal
3 for central seal

* in version with Ug 0.5 glazing

** Maximum size only possible
with correct height and aspect ratio**More info:**
[https://www.schueco.com/de-en/architects/
products/windows/pvc-u/living-82](https://www.schueco.com/de-en/architects/products/windows/pvc-u/living-82)

up
FENSTER & TÜRÉN