SCHÜCO
PREMIUM PARTNER

PROFILE SYSTEM
Easyslide
Lift and slide doors



DESIGN

Slim profiles and large glazed areas create a clean, delicate and light-filled aesthetic, which blends seamlessly into modern building projects.

LIVING COMFORT

The floor-level threshold ensures greater comfort in everyday life and enables barrier-free living.

SECURITY

Lift and slide doors from the Schüco EasySlide profile system can be specified up to resistance class RC 2, thereby offering a high level of burglary protection.

SYSTEM COMPATIBILITY

The full system compatibility of Schüco EasySlide and the CT 70 system enables a harmonious, uniform façade design.

VARIED COLOURS

A comprehensive range of colours and finishes offers individual design freedom – both for interior and exterior applications.


THERMAL INSULATION

The thermally optimised construction with two sealing levels ensures high thermal insulation and a Uw value of up to 0.90 W/(m²K).

up
FENSTER & TÜREN

SCHÜCO
PREMIUM PARTNER

PROFILE SYSTEM
Easyslide
Lift and slide doors

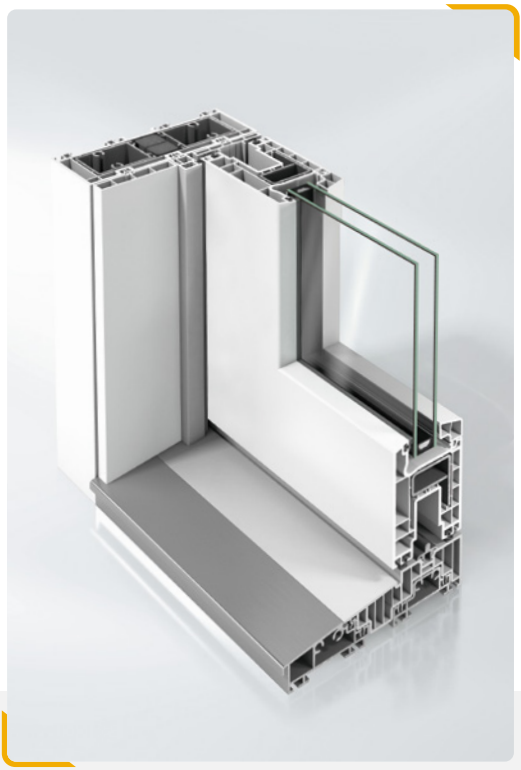

Suitable for:

NACHHALTIGES GEBÄUDE
BREEAM®
DGNB PLATIN
DGNB GOLD
DGNB SILBER
DGNB BRONZE*

TECHNICAL DATA

Basic depth outer frame	167 mm
Basic depth vent	70 mm
U_w value	up to 0,90 W/(m²K)*
Glass thickness vent	4–40 mm
Max. vent width**	3200 mm
Max. vent height**	2450 mm
Max sound reduction index	43 dB
Air permeability	Class 4
Watertightness	Class 6A
Wind load resistance	Class B2
Max. vent weight	300 kg
Burglar resistance	up to RC2
Operating forces	Class 1

Drainage levels	2
Proof of durability	DIN EN 12400, Class 2
Specials	can be fitted with an aluminium cover shell

* in version with U_g 0.6 glazing
* for a reference size of 3000 x 2180 mm
** Maximum size only possible with correct height and aspect ratio

More info:
https://www.schueco.com/de-en/architects/products/sliding-systems/pvc-u/easyslide

up
FENSTER & TÜREN